



Sunetex

**SUNSCREEN
FABRICS**

CLASSIC
COLLECTION

WWW.SUNETEX.COM

Sunetex

SUNSCREEN FABRIC
CLASSIC COLLECTION



FIBERGLASS

F1200 & FB1200 SERIES

F1200 Series :Openness 5%

FB1200 Series :Openness 3%

Composition: 29% Fiberglass & 71% PVC
Finished Width: 200/250/300cm
Thickness: 0.58mm \pm 5%
Standard Packing: 30M
Mesh Weight per m² 470g/m² \pm 5%
Mesh/In(inch): 48*46
Breaking Strength: Warp 1700N/5cm
Weft 1790N/5cm
Anti-Ultraviolet: 95%
Color Fastness: GB/T 8427-2008 GRADE 8
Fire Classification: NFPA701(USA)

29% Fiberglass & 71% PVC
200/250/300cm
0.62mm \pm 5%
30M
490g/m² \pm 5%
52*44
Warp 1800N/5cm
Weft 1800N/5cm
97%
GB/T 8427-2008 GRADE 8
NFPA701(USA)



www.sunetex.com

Sunetex

SUNSCREEN FABRIC
CLASSIC COLLECTION



FIBERGLASS



F1100 & FB1100 SERIES

F1100 Series :Openness 5%

FB1100 Series :Openness 3%

Composition: 35% Fiberglass & 65% PVC
Finished Width: 200/250/300cm
Thickness: 0.70mm ± 5%
Standard Packing: 30M
Mesh Weight per m² 540g/m² ± 5%
Mesh/In(inch): 36*36
Breaking Strength: Warp 2800N/5cm
 Weft 2800N/5cm
Anti-Ultraviolet: 95%
Color Fastness: GB/T 8427-2008 GRADE 8
Fire Classification: NFPA701(USA)

35% Fiberglass & 65% PVC
 200/250/300cm
 0.75mm ± 5%
 30M
 570g/m² ± 5%
 41*32
 Warp 2900N/5cm
 Weft 2800N/5cm
 97%
 GB/T 8427-2008 GRADE 8
 NFPA701(USA)



www.sunetex.com

Sunetex

SUNSCREEN FABRIC
CLASSIC COLLECTION



FIBERGLASS

FB1700 & FB1800 SERIES

FB1700 Series :Openness 3%

FB1800 Series :Openness 3%

Composition: 35% Fiberglass & 65% PVC
Finished Width: 200/250/300cm
Thickness: 0.81mm ± 5%
Standard Packing: 30M
Mesh Weight per m² 608g/m² ± 5%
Mesh/In(inch): 44*35
Breaking Strength: Warp 2745N/5cm
 Weft 1650N/5cm
Anti-Ultraviolet: 97%
Color Fastness: GB/T 8427-2008 GRADE 8
Fire Classification: NFPA701(USA)

29% Fiberglass & 71% PVC
 200/250/300cm
 0.75mm ± 5%
 30M
 515g/m² ± 5%
 54*47
 Warp 1230N/5cm
 Weft 1260N/5cm
 97%
 GB/T 8427-2008 GRADE 8
 NFPA701(USA)




www.sunetex.com

Sunetex

SUNSCREEN FABRIC
CLASSIC COLLECTION



FIBERGLASS BLACKOUT

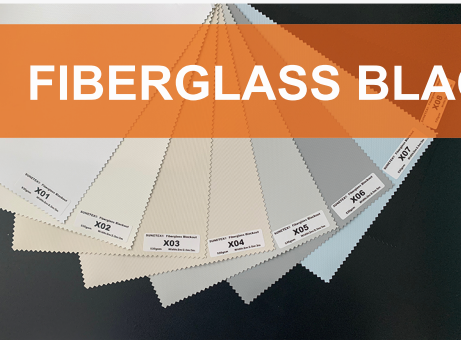

X00 SERIES

FIBERGLASS BLACKOUT PVC ROLLER FABRIC

Openness: 0%

Composition:	3 Ply PVC & 1 Ply 100% Fiberglass
Finished Width:	200/250/300cm
Thickness:	0.38mm \pm 5%
Standard Packing:	30M
Mesh Weight per m²	530g/m ² \pm 5%
Anti-Ultraviolet:	100%
Fire Classification:	NFPA701(USA)
Application:	Full Light Shading, Window Decoration, Roller Blind, Vertical Blind, Skylight Blind, and so on.
Environmental:	Yes



www.sunetex.com



SICHUAN GROUPEVE CO.,LTD

NO.1098,MIDDLE SECTION OF JIANNAN AVENUE,
HIGH-TECH ZONE,CHENGDU, SICHUAN, P.R. CHINA

TEL./FAX:0086-28-8533 3329

EMAIL:info@groupeve.com

www.sunetex.com